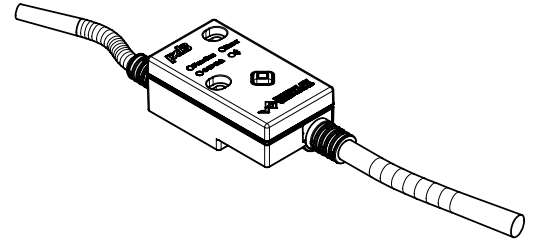


**Digital amplifier electronics PD3**

- For 1 proportional or switching solenoid
- With cable outlet for free choice of the valve connection plug
- Protection class IP 67
- Interface:
  - IO-Link (with Master Typ B)
  - Analogue
  - CANopen / J1939
- Adjustable via Bluetooth by means of the Wandfluh App


**DESCRIPTION**

Amplifier with cable outlet for free choice of the connection plug such as DIN EN 175301-803/ISO 4400, AMP Junior Timer or Deutsch DT04-2P. Protection class IP67. The connection and solenoid cable are mounted fixed in the device. With the IO-Link interface, the PD3 electronics can both be controlled and diagnosed. The amplifier is also available mounted directly on the solenoid.

**FUNCTION**

The electronics has a **Pulse-Width-Modulated** current output. This output is adjustable for a proportional or switching solenoid. The parameterisation is made via Bluetooth by means of the Wandfluh App.

**APPLICATION**

Due to its water spray resistant execution, the amplifier is suitable for most diverse applications. The M12 connector allows easy connection to standardized M12 sensor/actuator boxes. With the IO-Link interface, the PD3 electronics is prepared for IIoT and Industry 4.0.

**TYPE CODE**

		P	D3	4	0	1	D8	0	-	A	<input type="checkbox"/>	<input type="checkbox"/>	#	<input type="checkbox"/>
Connector														
Digital														
Adjustable via Bluetooth by means of the App														
Basic amplifier														
1-solenoid execution														
Supply voltage	8...32V (IO-Link: only 24V)													
Command value input	Voltage / current / digital / frequency / PWM									only [A] analogue				
12-bit resolution	For analogue input													
Type selection:														
• IO-Link	<input type="checkbox"/> Standard													
• Only analogue	<input type="checkbox"/> A													
• CANopen	<input type="checkbox"/> C on request													
• J1939	<input type="checkbox"/> J on request													
Connection cable	<input type="checkbox"/> 1.5 m, with M12 plug													
Design index (subject to change)														

**GENERAL SPECIFICATIONS**

Execution	With cable outlet for free choice of the valve connection plug
Connections	Connection cable PVC with M12 plug (male) 5-pole length = 1.5 m Solenoid cable PVC, 2 x 0,34 mm length = 0,5 m
Dimensions	See drawing page 3
Ambient temperature	-40...+85 °C (Derating see operating manual)
Installation	2 screws M3x20, tightening torque 0.1 Nm

Архангельск (8182)63-90-72  
 Астана (7172)727-132  
 Астрахань (8512)99-46-04  
 Барнаул (3852)73-04-60  
 Белгород (4722)40-23-64  
 Брянск (4832)59-03-52  
 Владивосток (423)249-28-31  
 Волгоград (844)278-03-48  
 Вологда (8172)26-41-59  
 Воронеж (473)204-51-73  
 Екатеринбург (343)384-55-89  
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
 Иркутск (395)279-98-46  
 Казань (843)206-01-48  
 Калининград (4012)72-03-81  
 Калуга (4842)92-23-67  
 Кемерово (3842)65-04-62  
 Киров (8332)68-02-04  
 Краснодар (861)203-40-90  
 Красноярск (391)204-63-61  
 Курск (4712)77-13-04  
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
 Москва (495)268-04-70  
 Мурманск (8152)59-64-93  
 Набережные Челны (8552)20-53-41  
 Нижний Новгород (831)429-08-12  
 Новокузнецк (3843)20-46-81  
 Новосибирск (383)227-86-73  
 Омск (3812)21-46-40  
 Орел (4862)44-53-42  
 Оренбург (3532)37-68-04  
 Пенза (8412)22-31-16

Пермь (342)205-81-47  
 Ростов-на-Дону (863)308-18-15  
 Рязань (4912)46-61-64  
 Самара (846)206-03-16  
 Санкт-Петербург (812)309-46-40  
 Саратов (845)249-38-78  
 Севастополь (8692)22-31-93  
 Симферополь (3652)67-13-56  
 Смоленск (4812)29-41-54  
 Сочи (862)225-72-31  
 Ставрополь (8652)20-65-13

Сургут (3462)77-98-35  
 Тверь (4822)63-31-35  
 Томск (3822)98-41-53  
 Тула (4872)74-02-29  
 Тюмень (3452)66-21-18  
 Ульяновск (8422)24-23-59  
 Уфа (347)229-48-12  
 Хабаровск (4212)92-98-04  
 Челябинск (351)202-03-61  
 Череповец (8202)49-02-64  
 Ярославль (4852)69-52-93

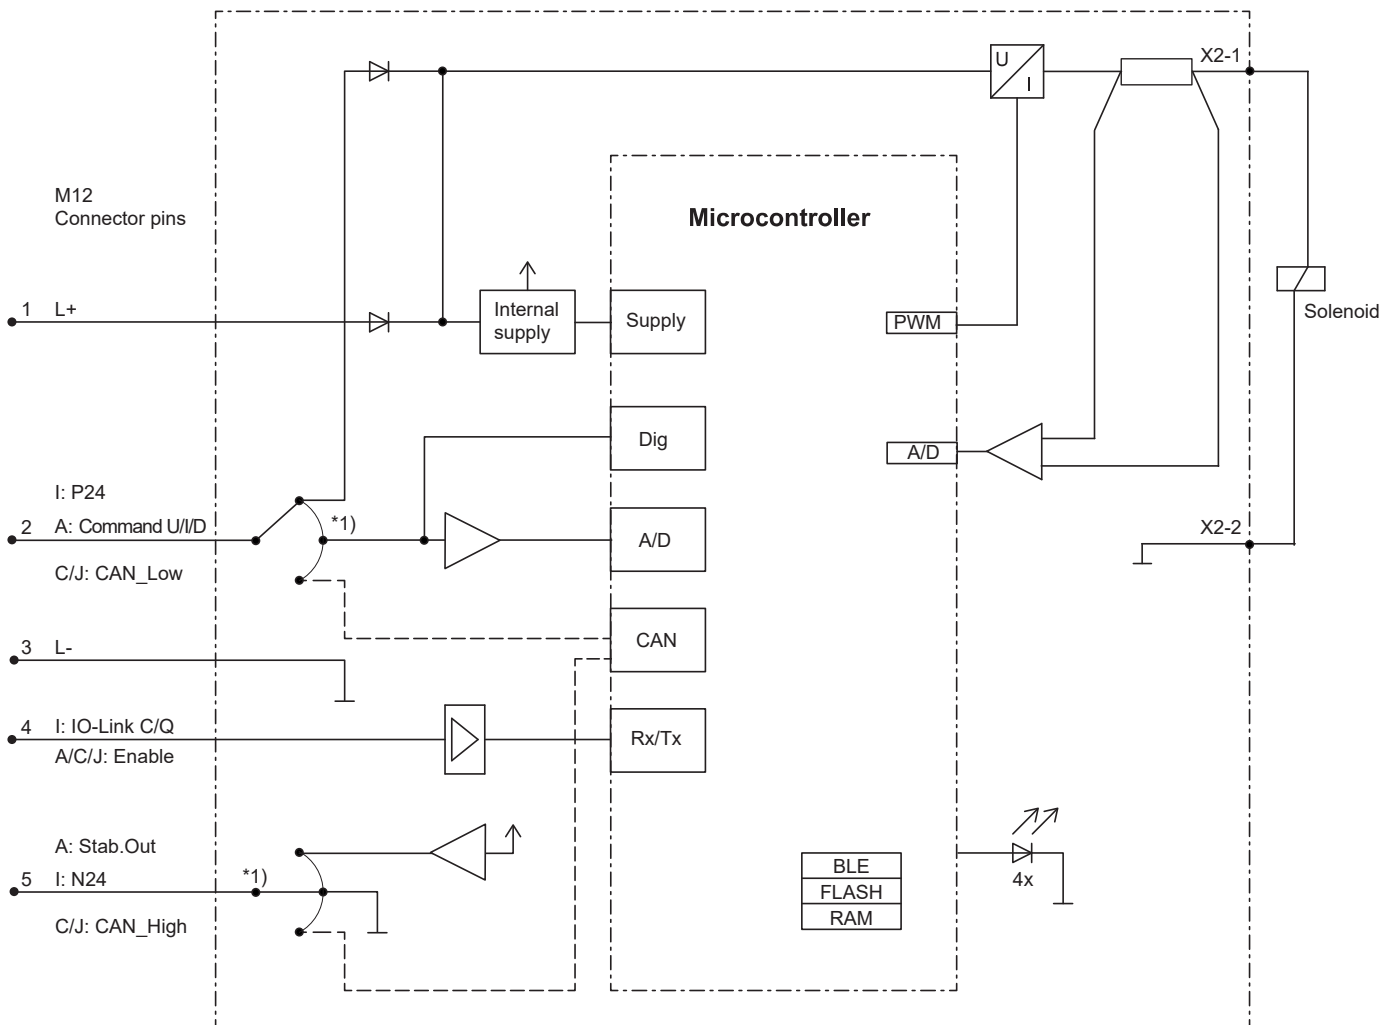
Киргизия (996)312-96-26-47

Россия (495)268-04-70

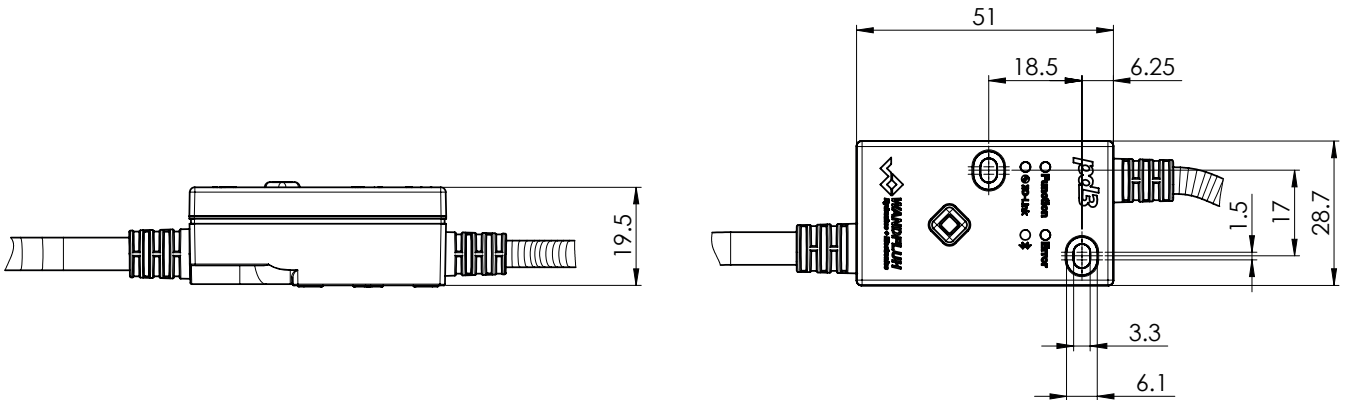
Казахстан (772)734-952-31

**ELECTRICAL SPECIFICATIONS**

Protection class	IP 67 acc. to EN 60 529	Dither	Frequency adjustable 4...500 Hz Factory setting 80 Hz
Supply voltage	IO-Link: 24 V (18..30V), analogue: 8..32V	Temperature drift	Level adjustable 0...400 mA Factory setting 180 mA
Residual ripple	< 1.3 Vpp	Enable input	<1 % bei $\Delta T = 40^\circ C$ 1 input high-active Switching threshold high 1/2 VCC +2V Switching threshold low 1/2 VCC -2V
Fuse	Low	Ramps	Adjustable 0...500 s
No-load current	Approx. 30 mA	IO-Link interface	Data line C/Q, COM2 = 38,4 kBaud Use master type B
Max. current consumption	No-load current + 2,5 A per solenoid	Bluetooth	Low Energy with access protection Contains FCC ID: QOQ11
Command value input	1 input non-differential Voltage / current (switchable by means of parameter) 0...+ 10V or 0/4...20mA Usable as frequency input (frequency 5...5000 Hz) or as PWM input (automatic frequency detection) or digital dig. switching threshold high >3V dig. switching threshold low <0.8V	Fieldbus (option)	CANopen (on request) J1939 (on request)
Resolution	12-bit	LEDs	Function green Bluetooth blue IO-Link green Error red
Input resistance	Voltage input >100 k $\Omega$ Load for current input = 124 $\Omega$	Supply solenoid	with IO-Link galvanically separated via P24/N24
Stabilised output voltage	5 VDC max. load 20 mA	EMV	2014/53/EU (Radio Equipment Directive) ETSI EN 300 328 47 CFR, Part 15 / ICES-003 ETSI EN 301 489-1 / 301 489-17
<b>Solenoid current:</b>		Immunity	EN 61 000-6-2
• Minimal current $I_{min}$	Adjustable 0... $I_{max}$ mA Factory setting 50 mA	Emission	EN 61 000-6-4
• Maximal current $I_{max}$	Adjustable $I_{min}$ ...2500 mA Factory setting 700 mA		

**BLOCK DIAGRAM**


\*1) fix selection according to type code

**DIMENSIONS**

**CONNECTOR ASSIGNMENT**

Valve connection cable (X1)  
 With mounted M12 connector  
 5-pole male A coded

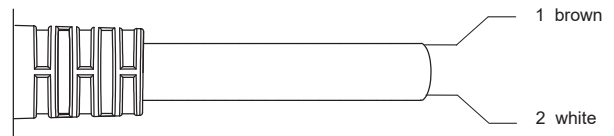

**Typ analogue**

- 1 (brown) Supply voltage VCC +
- 2 (green) Command value signal
- 3 (grey) Supply 0 VDC/GND
- 4 (white) Digital input
- 5 (yellow) Stabilised output voltage\*

**Typ I/O-Link**

- L+ supply voltage +
- P24/2L+ additional supply +
- L-supply 0 VDC/GND
- C/Q
- N24/2L-additional supply 0 VDC

Solenoid cable (X2)  
 Open end for free choice of the valve connection plug



- 1 = Solenoid +
- 2 = Solenoid -

\*Caution: Some M12 distributor boxes have the earth connection on pin 5 → Short-circuit hazard!

**START-UP**

Information regarding installation and commissioning are contained in the information leaflet supplied with the amplifier electronics and in the operating instructions.

Additional information can be found on our website:

Free-of-charge download:

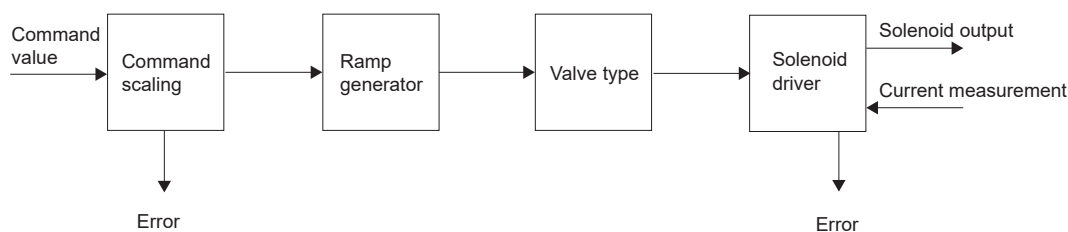
- Operating instruction (\*.pdf)
- Wandfluh App for Android (Google Play) and iOS (App Store)
- IO-Link Interface Description

**ADDITIONAL INFORMATION**

Wandfluh electronics general	Wandfluh documentation register
Proportional spool valves	1.13
Proportional pressure valves	1.10
Proportional flow control valves	2.3
Solenoid coil with PD3	2.6
	1.1-331

**ADJUSTMENTS**

The PD3 electronics has a Bluetooth interface. Via the Wandfluh App, the PD3 functions can be analysed and all parameters set.

**FUNCTION DESCRIPTION**


**PD3-AMPLIFIER**
**Command value scaling**

Type IO-Link: The command value can only be specified via IO-Link.  
 Type analogue: The command value can be specified as a voltage, current, digital, frequency or PWM signal.

**Ramp generator**

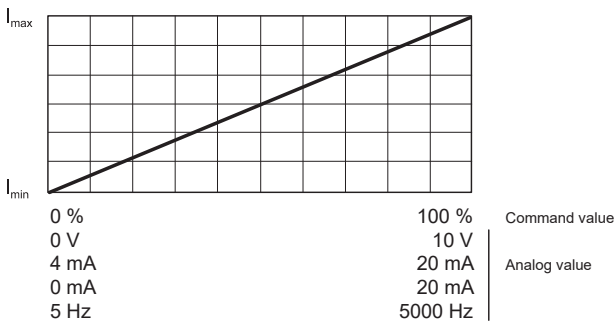
Two linear ramps for up and down are available which can be adjusted separately.

**Valve type**

Adjustment possibilities: switching solenoid or proportional solenoid.

**Mode of operation «Command value unipolar/bipolar (1-Sol)»**

Dependent on a command value signal (IO-Link, voltage, current, digital, frequency or PWM), the solenoid is controlled (e.g. 0...10V correspond to 0...100 % command value, which again corresponds to Imin...Imax solenoid driver).

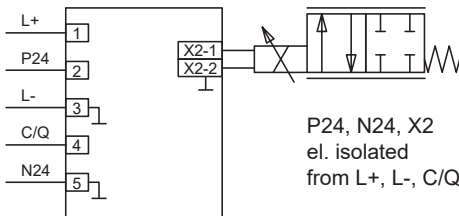
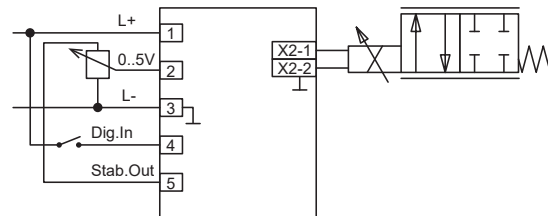

**Solenoid driver**

A Pulse-Width-Modulated current output is available. A dither signal is superimposed, whereby the dither frequency and the dither level are separately adjustable. The minimum (Imin) and maximum (Imax) current can be adjusted. The solenoid output can also be configured as switching solenoid output. In this case, a power reduction can be adjusted.

**Channel enabling**

Enable can be configured by means of the App:

- on
- off
- external (enable input with type analogue)
- bus (with type IO-Link)

**CONNECTION EXAMPLES**
**Connection example IO-Link**

**Connection example analogue with stabilised output**


Архангельск (8182)63-90-72  
 Астана (7172)727-132  
 Астрахань (8512)99-46-04  
 Барнаул (3852)73-04-60  
 Белгород (4722)40-23-64  
 Брянск (4832)59-03-52  
 Владивосток (423)249-28-31  
 Волгоград (844)278-03-48  
 Вологда (8172)26-41-59  
 Воронеж (473)204-51-73  
 Екатеринбург (343)384-55-89  
 Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
 Иркутск (395)279-98-46  
 Казань (843)206-01-48  
 Калининград (4012)72-03-81  
 Калуга (4842)92-23-67  
 Кемерово (3842)65-04-62  
 Киров (8332)68-02-04  
 Краснодар (861)203-40-90  
 Красноярск (391)204-63-61  
 Курск (4712)77-13-04  
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
 Москва (495)268-04-70  
 Мурманск (8152)59-64-93  
 Набережные Челны (8552)20-53-41  
 Нижний Новгород (831)429-08-12  
 Новокузнецк (3843)20-46-81  
 Новосибирск (383)227-86-73  
 Омск (3812)21-46-40  
 Орел (4862)44-53-42  
 Оренбург (3532)37-68-04  
 Пенза (8412)22-31-16

Пермь (342)205-81-47  
 Ростов-на-Дону (863)308-18-15  
 Рязань (4912)46-61-64  
 Самара (846)206-03-16  
 Санкт-Петербург (812)309-46-40  
 Саратов (845)249-38-78  
 Севастополь (8692)22-31-93  
 Симферополь (3652)67-13-56  
 Смоленск (4812)29-41-54  
 Сочи (862)225-72-31  
 Ставрополь (8652)20-65-13

Сургут (3462)77-98-35  
 Тверь (4822)63-31-35  
 Томск (3822)98-41-53  
 Тула (4872)74-02-29  
 Тюмень (3452)66-21-18  
 Ульяновск (8422)24-23-59  
 Уфа (347)229-48-12  
 Хабаровск (4212)92-98-04  
 Челябинск (351)202-03-61  
 Череповец (8202)49-02-64  
 Ярославль (4852)69-52-93

Киргизия (996)312-96-26-47

Россия (495)268-04-70

Казахстан (772)734-952-31

<https://wandfluh.nt-rt.ru/> || [wha@nt-rt.ru](mailto:wha@nt-rt.ru)